

Improved Modified Reverse AODV Protocol

Pushendra Kumar
Computer Science & Engineering Department
Madan Mohan Malaviya
Engg. College, Gorakhpur

Rohit Kumar
Computer Science & Engineering Department
Madan Mohan Malaviya
Engg. College, Gorakhpur

Satyendra Kumar
Computer Science & Engineering Department
Madan Mohan Malaviya
Engg. College, Gorakhpur

Rajendra Kumar Dwivedi
Asst. Professor
Computer Science & Engineering Department
Madan Mohan Malaviya
Engg. College, Gorakhpur

ABSTRACT

In this paper a new protocol for mobile Ad-Hoc network is presented, it is a modified version of modified reverse AODV, in MRAODV(modified reverse AODV) we estimate the stability of paths but in this protocol we also consider about the energy of each node in the paths, in this protocol we are going to present an algorithm to select maximum suitable path between source and destination on the basis of energy of nodes, stability of nodes and hop-count of paths.

General Terms

Your general terms must be any term which can be used for general classification of the submitted material such as Pattern Recognition, Security, Algorithms et. al.

Keywords

Ad-hoc network, AODV routing algorithm, Reverse – AODV routing algorithm and modified reverse AODV routing algorithm.

I. INTRODUCTION

Mobile ad hoc networks (MANET) consist of mobile platform which communicate with each other through wireless links without any predetermined infrastructure [6, 7]. Each node not only is a host but also as a router that maintains routes to and forwards data packets for other nodes in the network that may not be within direct wireless transmission range. Topology of a mobile ad-hoc network often changes rapidly and we need to manage this change and cope with problems raised through this type of networks. If the source and destination nodes are not within the transmission range of each other, then intermediate nodes would be served as intermediate routers for the communication between the two nodes [9, 10]. Moreover, mobile platform moves autonomously and communicates via dynamically changing network. Thus, frequent change of the network topology is a main challenge for many important topics, such as routing protocol, robustness and performance degradation [2]. Recently, some adaptive ad hoc routing protocols have

been reported. For example, Associativity Based Routing (ABR) [3] which according to this algorithm, each node periodically transmits beaconing ticks to identify itself, and a stable link exists if a large amount of the ticks are received and accumulated at the receiving node. This protocol selects a shortest route pass through stable links. Another protocol that uses stability is Signal Stability-based Adaptive routing (SSA) [4], chooses the route if the receiving signal strengths of radio links along this route are larger than a threshold value; otherwise, the shortest path routing algorithm applies to find another route. However, since the correlation time between two receiving signals or ticks is short for a MANET, these two protocols find stable links and routes from deterministic parameters without considering the variation of signal strengths and network topologies of mobile ad hoc networks. In this paper we first consider the Ad-hoc On-Demand Distance Vector Routing Protocol (AODV) that uses a demand-driven route establishment procedure, then we present an optimized version of this algorithm namely Reverse AODV (RAODV). For increasing of protocol performance, we use route stability parameter to select the best route between available routes. For path discovery, the route with highest stability will be selected. We then present our routing protocol namely Modified-RAODV (MRAODV) routing algorithm which it can be an extension for RAODV. The MRAODV routing algorithm can present good performance for high mobility environments. Performance of our algorithm is compared with AODV and RAODV routing algorithm from performance view point and MRAODV is superior to these algorithms in some way.

The text should be in two 8.45 cm (3.33") columns with a .83 cm (.33") gutter.

II. Ad-hoc on –demand distance vector routing PROTOCOL(AODV)

The Ad-hoc On-Demand Distance Vector routing Protocol (AODV), is one of more common routing algorithm in ad hoc networks and is based on the principle of discover routes as needed. AODV is a reactive algorithm that has some capabilities such as; low processing, memory overhead, low network

utilization, and it works well even in high mobility situation. AODV routing algorithm is a prominent method for building routes between network nodes. The request is made on-demand rather than in advance, to account for the continually changing network structure, which is likely to invalidate routing tables over time [1]. The routing table stores information about next hop to the destination and a sequence number which is received *request (RREQ) packet* to its neighbors. The RREQ has following fields:

< source_addr, source_sequence-#, broadcast_id, dest_addr, dest_sequence_#, hop_cnt >

When intermediate nodes receive a *route request packet*, they update their routing tables for a reverse route to the source and like this process, when the intermediate nodes receive *route reply packet (RREP)*, they update the forward route to the destination. The *route reply packet* contains the following fields:

<source_addr, dest_addr,dest_sequence_#,hop_cnt,lifetime>

AODV protocol uses sequence numbers to determine the timeliness of each packet and to prevent creation of loops.

AODV algorithm uses *Route Error Message (RERR)* route failures and link failures propagated by a RERR from a broken link to the source node of the corresponding route. When the next hop link breaks, RERR packets are sent by the starting node of the link to a set of neighboring nodes that communicate over the broken link with the destination.

III. Reverse aodv algorithm

AODV routing algorithm builds a single loop-free path to each other node on the network [1]. One disadvantage of AODV and most on-demand routing protocols is a route reply message loss. In reverse AODV algorithm this problem concerned and one efficient approach proposed. AODV and most of on-demand routing is based on single route reply message. The lost of route reply message may cause a significant degradation of performance. In route discovery phase, a *route reply message (RREP)* of AODV obtains by the spending cost of flooding the entire network or a partial area. RREP loss leads to source node reinitiate route discovery process which causes degrade of the routing performance, like high power consumption, long end-to-end delay and inevitably low packet delivery ratio. In RAODV algorithm, loss of RREP messages considered. In reverse AODV (RAODV), destination node uses reverse RREQ to find source node. It reduces path fail correction messages and can improve the robustness of performance. Therefore, success rate of route discovery may be increased even though high node mobility situation [5]. Route request packet in RAODV like AODV contain following fields where, the source and destination addresses, together with the broadcast ID, uniquely identify this RREQ packet.

The packet format is given in the next column. There are seven fields in this packet and in IMRAODV proposed protocol

this packet is going to update by an extra energy field ,which is described in further section of this paper.

TYPE	RESERVED	HOP COUNT
Broadcast ID		
Destination IP Address		
Destination Sequence Number		
Source IP Address		
Source Sequence Number		
Request Time		

When the destination node receives first route request message, it generates *reverse request (R-RREQ)* message and broadcasts it to neighbor nodes within transmission range. The *reverse request packet* contains following fields:

TYPE	RESERVED	HOP COUNT
Broadcast ID		
Destination IP address		
Destination Sequence Number		
Source IP Address		
Reply Time		

When broadcasted *reverse request packet* arrives to intermediate node, it will check for redundancy. If it already received the same message, the message is dropped, otherwise forwards to next nodes and when the source node receives first *reverse request message*, then it starts packet transmission, and late arrived R-RREQs are saved for future use. The alternative paths can be used when the primary path fails communications [5].

IV. Modified Reverse Ad Hoc On Demand Distance Vector (MRAODV) routing algorithm

RAODV routing algorithm increases performance and when route fails occurs, the source node should select the best route

between available routs. In this paper, we apply stability estimation method for rout selection and to increase performance. Breaking radio links among nodes may easily happen due to the changing network topologies.

Therefore, a good design of the ad hoc routing protocol is needed to overcome these problems. Several ad-hoc routing protocols fOf MANETs have been proposed in recent years. RAODV algorithm solves this problem with selecting the rout with minimum length in available set of routes that have been already found. Here we change this stage with our approach. One kind of link stability is used in AOSV [6]. In AOSV algorithm for computing link/rout stability, initially every node begins to estimate the stabilities of radio links to its neighbors and for keeping track of the link stabilities between a node and its neighbors, each node periodically broadcasts *Hello message*(HELLO) including the location of the broadcasting node toward its neighbors. In this protocol, when a node receives *Hello messages*, this node first calculates the distance between neighboring node and itself from the received HELLOs and for sake of awareness of distance, evaluates the stability of radio link to the broadcasting neighbor. This information is recorded for estimating stabilities of multi-hop routes in follow-up processes. In path discovery process, source node broadcasts RREQ which has new link stability field. Intermediate node sends receive RREQs and rebroadcast them. The intermediate nodes rebroadcast only the RREQ with the maximum value in

route stability among received RREQs. In our proposed routing algorithm (MRAODV), when a source node wants to communicate with a destination node, first it broadcasts a RREQ packet. This stage is the like of AODV algorithm. When destination receives a RREQ message, it broadcasts R-RREQ message to find source node. Each intermediate node which receives the R-RREQ message, calculates route stability by equation (2) and the route stability for each router is calculated by the following equation.

$$RS_r = \prod ns_i \quad (1)$$

Where RS_r is the route stability of the route r,

L_r is the set of available routes and

ns_i is the stability of node i .

The stability of each route can be calculated by following equation:

$$ns_i = (t - t') / (l_n - l_n')$$

Where l_n denotes the location of node n_i at the time t . For t computation of stability for each node we need to obtain $t - t'$

delay. When source node receives R-RREQ, it will have multiple routes to destination, so it selects stable route to destination node. This process is illustrated in figure 3.

According to this figure when one intermediate node moves and causes link breaks then active route fails and a new route must be selected. In AODV, this process is done by initializing route discovery procedure and in RAODV with selecting one available route with minimum hop count. In MRAODV, a new route with maximum stability is selected between available routes. We add link stability field to R-RREQ packet. When destination node receives first RREQ, it broadcasts R-RREQ. Every intermediate node which receives R-RREQ packet, it computes link stability and records it. When source node receives R-RREQ packets, it has information about stability of available routs to destination node. So it can select a route with highest stability. When data transmission is started then this information is applied for route maintenance.

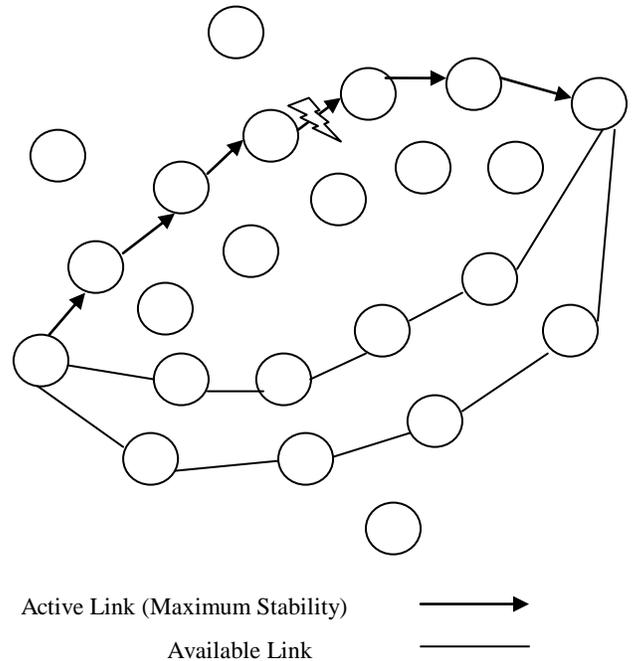


Fig. 3 Selection of one available Stable route from source node to destination node when active link fails

When a route established between source and destination, data transmission stage can be started. In high mobility environments, link failure is a common phenomenon which can be occurred. We claim that the MRAODV routing algorithm is suitable for these environments. Source node is aware to stability of the routes which it has found in path

discovery stage If an intermediate node in active route moves and link breaks source node can select a stable route instead of failed rout. Both reverse RAODV and AODV routing algorithms, source node selects new path based on shortest path method and when mobile node moves quickly, these algorithms can not show good performance. Here, we add link stability

parameter to RAODV algorithm to select the best route between available routes set, when active route fails.

V . IMPROVED modified reverse aodv Routing protocol

In MRAODV we calculate the stability of each nodes and using this we estimate the relative stability of paths, and we select the path having maximum stability, but one lagging point of this protocol is that it doesn't consider about the energy of nodes, what will happen if we select a path having maximum stability and a node with very less energy in the path? Using MRAODV we will choose that path because there is no consideration of energy in MRAODV, this may cause a breakage in path having maximum stability.

In IMRAODV the concept of energy is also included and so assign the priority of different dedicated paths between source and destination on the basis of both energy as well as the stability of nodes or paths .

IMRAODV: In this protocol if there is need of path then source would broadcast a RREQ message to it's neighbours and any of the neighbor is either destination or knows path to destination then it will broadcast the R-RREQ message to it's neighbours otherwise rebroadcast the RREQ message to all it's neighbours.

Here in this protocol format of RREQ is same as MRAODV but the format of R-RREQ packet slightly differ from that of MRAODV.

R-RREQ in IMRAODV contains following fields-

TYPE	RESERVE	Hop Count
Broadcast ID		
Destination IP address		
Destination Sequence number		
Source IP address		
Reply Time		
Energy		

When a node receive a R-RREQ message then it first compares it's Energy with Energy of R-RREQ packet . Comparison done in following way –

```
If (ENERGY of current node < ENERGY in R-RREQ packet)
then do
    Energy in R-RREQ packet = Energy of current node.
```

In this way each R-RREQ packet reaching through different path to source contains the minimum energy of node in that path.

Within a certain time Source receive all R-RREQ packets .

And make records of all paths. Now source will choose the path on the following basis-

Let

$E_{\text{threshold}} = \text{some constant energy } E$

If (two or more paths have energy $\leq E_{\text{threshold}}$)

```
then do
    give higher priority to the path having maximum
    energy in R-REQ packet
```

else

give the higher priority to the path having maximum stability.

After assigning the priorities to paths Source will select the path having higher priority, if this path breaks then next higher priority path will be selected.

VI. Conclusion

This paper presented a new protocol for mobile ad hoc networks based on link stability and energy of paths. We changed MRAODV routing algorithm and made an optimized version of AODV. New method shows good performance in some ways. In IMRAODV we changed route replay packet content of MRAODV. These packets should be transmitted to destination node for building multiple routes. According to the theoretical concept, this algorithm is better than other version of AODV algorithm.

VI. References

- [1] Mehdi Zarei, Karim Faez and Javad Moosavi Nya , "Modified Reverse AODV Routing Algorithm using Route Stability in Mobile Ad Hoc Networks" *Proceedings of the 12th IEEE International Multitopic Conference, December 23-24, 2008*
- [2] C. E. Perkins and E. M. Royer, "Ad hoc on-demand distance vector routing," in Proc. WMCSA, New Orleans, LA, Feb. 1999, pp. 90-100.
- [3] Zhi Li and Yu-Kwong Kwok, "A New Multipath Routing Approach to Enhancing TCP Security in Ad Hoc Wireless Networks" in Proc. ICPPW 2005.
- [4] Toh C-K. Associativity-based routing for ad-hoc mobile networks. *Wireless Personal Communications Journal, Special Issue on Mobile Networking and Computing Systems*, March 1997; Kluwer Academic Publishers, 4: No. 2, 103-139.
- [5] R. Dube, C.D. Rais, K.-Y. Wang, and S.K. Tripathi, "Signal Stability-Based Adaptive Routing (SSA) for Ad Hoc Mobile Networks", *IEEE Personal Communications Magazine*, vol. 4, no. 1, February 1997, pp.36-45.
- [6] Chonggun Kim, Elmurod Talipov, and Byoungchul Ahn, "A Reverse AODV Routing Protocol in Ad Hoc Mobile Networks", *LNCS 4097*, pp. 522-531, 2006.
- [7] 1. Tarng, B.Chuang and F. Wu , "Link Stability-based Routing Protocol for Mobile Ad Hoc Networks", 2006 IEEE Conference on Systems, Man, and Cybernetics October 8-11, 2006, Taipei, Taiwan
- [8] NS, The UCB/LBNL/NINT Network Simulator (NS), <http://www.isLedu/nsnam/ns/>, 2004.
- [9] L. Layuan, L. Chunlin, Y. Peiyan, "Performance evaluation and simulations of routing protocols in ad hoc networks", s.l. : Elsevier, *Computer Communications*, 2007.
- [10] H. Pucha, S. M. Das, Y. C. Hu. The performance impact of traffic patterns on routing protocols in mobile ad hoc networks. s.l. : Elsevier, *Computer Networks*, 2007.
- [11] Lu, Y., Weichao, W., Zhong, Y., Bhargava, B.: "Study of Distance Vector Routing Protocols for Mobile ad hoc networks"; *Proceedings of the First IEEE International Conference 2003*.
- [12] Min Sheng, jiangdong Li and Van Shi, "Delay Sensitive Adaptive Routing Protocol for Ad Hoc Network," 17 th International Conference on Advanced Information Networking and Applications (AINAt03), March 27-29, 2003.
- [13] Izhak Rubin and Y. C. Liu, "Link Stability Models for QoS Ad Hoc Routing Algorithms," *Vehicular Technology Conference, 2003. VTC 2003-Fall. 2003 IEEE 58th*.
- [14] Michael Gerharz, Christian de Waal, Mattihias Frank, Peter Martini, "Link Stability in Mobile Wireless Ad Hoc Networks." *Mobile and Wireless Communications Network, 2002. 4th International Workshop on, 9—11 Sept. 2002*.